

# SCHMIDT® PressControl

## Machine control units

**SCHMIDT® PressControl 75, 700 and 7000** are control units of the latest generation, which allow the design of modern production processes – from the single workstation to complete automation. You benefit from our competence in:

- safety technology – EC type approved machines
- process measurement technology – simultaneous measurement technology in the process
- process documentation

The control systems have the following features:

- efficient due to intuitive user interfaces on touch / multi-touch screen
- fast and safe setup of processes in a clearly arranged window, simple parameterization for manual ram movement and transfer of the actual parameters force and path to the motion blocks (teach-in) for the **PressControl 700** and **7000** controls in combination with ServoPress/TorquePress/ElectricPress
- the integrated PLC allows the control of additional inputs/ outputs or sensors/actuators and thus the application-specific set-up of the workstation or system
- the integrated measurement data acquisition is insensitive to interferences (EMC). This results in a high measurement reliability of the entire system
- with the integrated safety technology, the entire system becomes an EC type-approved single workstation
- service functions enable simple and efficient maintenance
- guarantee of complete process documentation with clearly traceable component assignment

**SCHMIDT® PressControl 75**




**SCHMIDT® PressControl 7000 RT**



**SCHMIDT® PressControl 700**



**SCHMIDT® PressControl 7000 HMI**

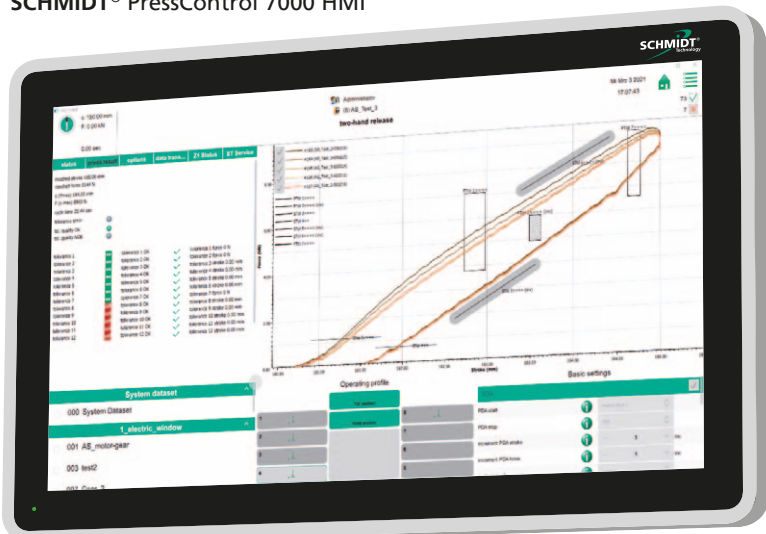

# SCHMIDT® PressControl 75

## Compact functionality

Highly compact yet multifunctional **SCHMIDT® PressControl 75** available for these press systems:

- **SCHMIDT® ElectricPress**
- **SCHMIDT® PneumaticPress**
- **SCHMIDT® HydroPneumaticPress**

Its easy and intuitive touchscreen allows for quick and efficient process set-up or change-over. Process specific data can be stored in up to 24 datasets.

The **SCHMIDT® SafetyModule** allows the design of single workstations with safety technology that meets the latest global standards for two-hand cycle initiation, guarding or light-curtain protection.



| Technical Data         |  |
|------------------------|--|
| Supply voltage         | 24 V DC  |
| Current                | < 3 A  |
| Operating temperature  | 0 – 40 °C  |
| Protection class       | IP 54  |
| Interfaces             | <ul style="list-style-type: none"> <li>■ CANopen for PRC -Gateway or CANopen Compact Box IP 2401</li> </ul>  |
| Electrical connections | All connections are pluggable  |
| Display                | <ul style="list-style-type: none"> <li>■ 2.8" touch screen</li> <li>■ Process information</li> </ul>   |
| Operation              | <ul style="list-style-type: none"> <li>■ 4 function keys</li> <li>■ 3 languages, switchable</li> </ul>   |
| Modes of operation     | <ul style="list-style-type: none"> <li>■ Two-hand release with SafetyModule</li> <li>■ Light curtain with SafetyModule</li> <li>■ Start button for operation without SafetyModule</li> <li>■ Workpiece control</li> <li>■ Activation of sliding table</li> <li>■ Return stroke initiation with external signal</li> <li>■ Blow-out/blow-off</li> </ul> |
| Operating functions    | <ul style="list-style-type: none"> <li>■ Piece- or preselection counter</li> <li>■ Set-up mode</li> <li>■ BDC dwell time</li> <li>■ User Management</li> </ul>   |
| Dimensions             | 90x120x60 (hxxwx d)  |
| Mounting               | Fastening screws, optional magnet holder   |

|                                |
|--------------------------------|
| >>press parameter<<            |
| presstime endposition<br>0,5 s |
| >>counter<<                    |
| preselect counter<br>off       |
| preselect quantity<br>10 pcs   |

Data input

| DATASET1 (1)     |     |     |
|------------------|-----|-----|
| Quantity OK      | 4   | pcs |
| Quantity NOK     | 1   | pcs |
| Presstime        | 0,5 | s   |
| Two-hand release |     |     |

Data output

| DATASET1 (1)     |     |     |
|------------------|-----|-----|
| Quantity OK      | 4   | pcs |
| Quantity NOK     | 1   | pcs |
| Presstime        | 0,5 | s   |
| Two-hand release |     |     |

Data output

# SCHMIDT® PressControl 700

"All in one" control and visualization for the single workstation

The **SCHMIDT® PressControl 700** for single workstations for the control and monitoring of pressing and joining processes. In addition to precise assembly tasks, the fast acquisition of extensive process data and bidirectional data exchange is becoming more and more important.


The **SCHMIDT® PressControl 700** real-time controller communicates with the process components via the high-performance and fast field bus EtherCAT with a transmission rate of 100 Mbit/s and a transmission speed of 0.5 ms. With this the press control meets the requirements for fast processing of large data volumes. The leap into other fieldbus worlds is realized by using optional fieldbus gateways.

Process visualization takes place directly on the PressControl 700. Via the Ethernet interface, the control communicates with MES systems and external PCs as well as PRC DataBase and PRC FileX-change software.

The press control system is optimally designed for **SCHMIDT® press systems**. Thanks to the integrated PLC, process visualization, the best possible compatibility and performance is achieved. All components are tested and matched to each other in the network and are therefore ready for immediate use.

## User Surface

- 10,1" Full HD multi-touch-screen
- setup and setting of parameters via "drag & drop"
- compact display of the entire process in the home view
- individual sizing of the process windows (splitter function)
- language switchable

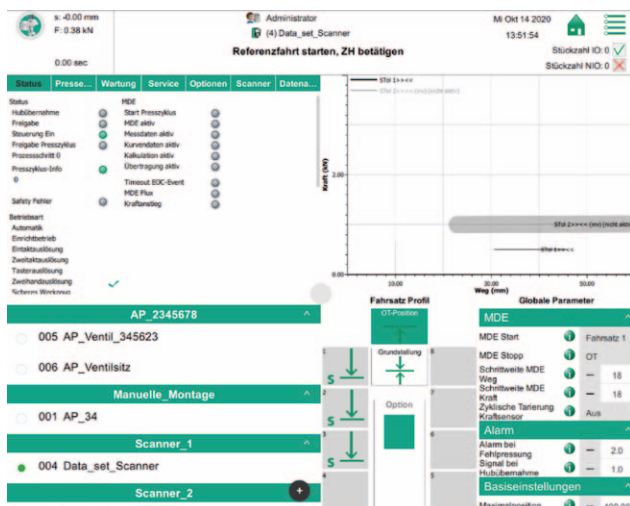

## Technical Data

|                     |  |
|---------------------|--|
| Industrial PC       | Intel E3990 processor<br>2 GB main memory<br>16 GB on-board Flash (eMMC)<br>4 GB CFAST<br>Linux operating system |
| Schnittstellen      | 2 x USB 2.0<br>2 x USB 3.0<br>1 x Ethernet, M12 (LAN1)<br>1 x Ethernet, M12 (LAN2)<br>1 x EtherCAT-P, M8         |
| Power supply        | 24 V DC (EtherCAT-P)   |
| Stromaufnahme       | max. 1,3 A   |
| Weight              | ca. 1,9 kg   |
| Umgebungstemperatur | 0 °C ... +40 °C  |
| Luftfeuchtigkeit    | 0 ... 90 % relative Feuchte (nicht kondensierend)  |
| Schutzart           | IP 54  |

# SCHMIDT® PressControl 7000

## Compact system control for intelligent process control

The **SCHMIDT® PressControl 7000 RT** for single workstations for the control and monitoring of pressing and joining processes. In addition to precise assembly tasks, the fast acquisition of extensive process data and bidirectional data exchange is becoming more and more important.

The **SCHMIDT® PressControl 7000 RT** real-time controller communicates with the process components via the high-performance and fast field bus EtherCAT with a transmission rate of 100 Mbit/s and a transmission speed of 0.5 ms. With this the press control meets the requirements for fast processing of large data volumes. The leap into other fieldbus worlds is realized by using optional fieldbus gateways.

Process visualization takes place directly on the PressControl 700. Via the Ethernet interface, the control communicates with MES systems and external PCs as well as **PRC DataBase** and **PRC FileXchange** software.

The press control system is optimally designed for **SCHMIDT® press systems**. Thanks to the integrated PLC, process visualization, the best possible compatibility and performance is achieved. All components are tested and matched to each other in the network and are therefore ready for immediate use.

### SCHMIDT® PressControl 7000 HMI

- 21.5" Full HD multi-touch screen
- Multi-axis applications can be visualized
- Setup and setting of parameters via "drag & drop"
- Installation of optional software tools such as **SCHMIDT® PRC DataBase** or **PRC FileXchange** is prepared



### Technical Data PressControl 7000 RT

|                     |  |
|---------------------|--|
| Industrial PC       | Intel E3990 Processor<br>2 GB main memory<br>16 GB on-board flash (eMMC)<br>4 GB CFAST<br>Linux operating system   |
| Interfaces          | 1 x display port<br>2 x USB 2.0<br>2 x USB 3.0<br>3 x Ethernet, RJ45 (LAN1 via integrated switch on 3 ports)<br>1 x Ethernet, RJ45 (LAN2)<br>1 x EtherCAT, RJ45<br>Universal Fieldbus, integrated compartment for installation |
| Power supply        | 24 V DC (via 3-pin plug)   |
| Current consumption | 1 A  |
| Weight              | approx. 0.73 kg  |
| Ambient temperature | 0 °C ... +65 °C  |
| Storage temperature | -20 °C ... +70 °C  |
| Humidity            | 0 ... 90 % relative humidity (non-condensing)  |
| Protection class    | IP 20; PressControl 7000RT in the switch cabinet   |

### Technical Data PressControl 7000 HMI

|                     |  |
|---------------------|--|
| Industrial PC       | Intel i5-7xxx Processor<br>64 GB CFAST operating system<br>512 GB HDD data memory<br>Operating system Windows 10 |
| Monitor             | 21.5" full HD monitor (1920 x 1080) with capacitive multi-touchscreen  |
| Interfaces          | 1 x HDMI<br>2 x USB 2.0<br>2 x GBit Ethernet, M12, X-coded (LAN1, LAN2)<br>2 x integrated speaker                |
| Power supply        | 24 V DC (via 4-pin M12 plug, T-coded)  |
| Current consumption | 2 A  |
| Weight              | approx. 9.5 kg   |
| Ambient temperature | 0 °C ... +40 °C  |
| Storage temperature | -20 °C ... +60 °C  |
| Humidity            | 5 ... 90 % relative humidity (non-condensing))   |
| Protection class    | IP 54  |
| Mounting            | VESA 75  |



# User surface for professional assembly

## For PressControl 700 and 7000

The user interface for professional assembly is installed in the **SCHMIDT® PressControl 700 and 7000**. The functionality has been developed specially for assembly operations with immediate reaction in the process.

The following functions are available

- process visualization
- process data management
- development tool (PLC editor)
- **SCHMIDT® PRC DataBase, PRC FileXchange, PRC OPC** optional

### Process Monitoring

- high graphical curve resolution for detailed view of curve segments
- three graphic displays; force/stroke, force/time and stroke/time for process analysis and optimization
- extensive tool library
- result visualization OK/NOK (green/red)
- tolerance observers

### Process Output

Actual system statuses are displayed both text-oriented and graphically and thus enable a transparent process overview for quick analysis and troubleshooting.


### Software Options

The comprehensive software packages for process data management and process optimization can be activated individually and specifically stored in data sets.

### Characteristics

- easy and fast setting of parameters for the processes
- definition of data sets and motion profiles by parameter setting
- process optimization by switching the process display (F/s, F/t, s/t)
- easy definition and evaluation of processes via quality observers
- 12 QA observers can be defined as F/s windows or stroke tolerances as required
- safe detection of bad parts (NOK)
- Clear documentation and part assignment
- software PLC to freely program sequences
- service functions for diagnosis and system updates

### User Interface **SCHMIDT® PressControl 700**

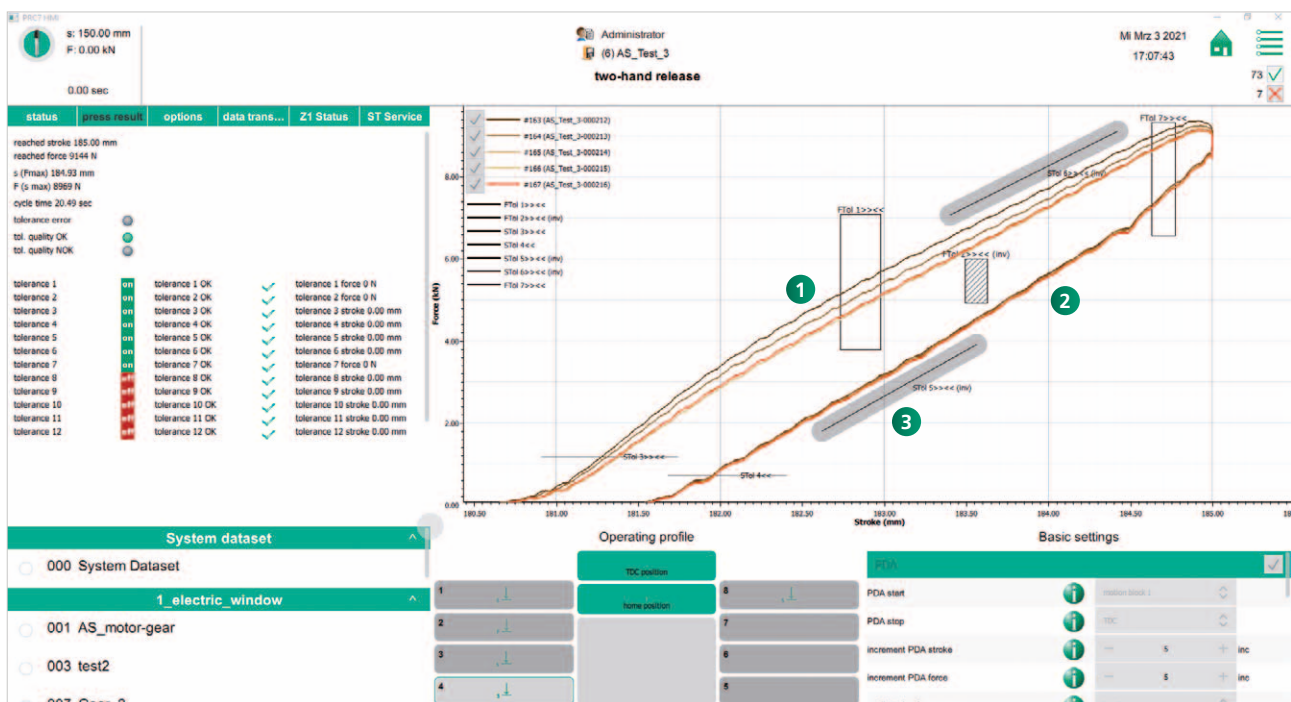

- 1 + 2 All tolerances can also be used inverted (blocking ranges) 3 Stroke tolerances can be adapted to curve gradient

# SCHMIDT® ServoPress/TorquePress

## Driving profiles and applications

**SCHMIDT® ServoPress / TorquePress** enable simple configuration of the driving profiles with motion blocks. In order to realize a quick setup, different standard driving profiles are available.

Experience shows that these standard driving profiles and combinations cover most applications. Up to 8 motion blocks can be combined as desired.

### Positioning to "stroke"

Normal driving profile, typically combined with bending compensation.

### Closed loop "force" control






For processes in which the force achieved is a measure of the process quality, e.g. material compressing processes.

### Driving on touch force and "delta stroke"

For processes in which component tolerances must be reached. The press scans the surface and presses in to a specific differential dimension as soon as the defined force is reached.

### Driving on "Force increase"

The return stroke is initiated at a defined force increase (slope)




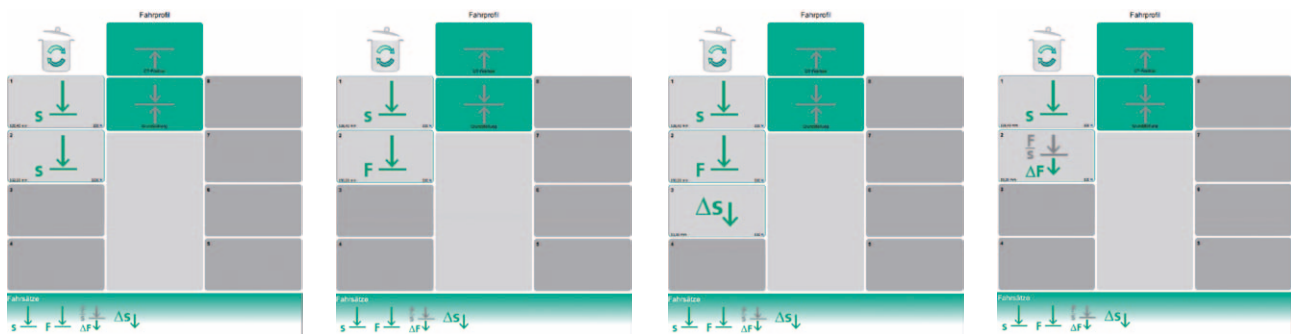


Pressing until reaching a specified position leads to precise results in connection with bend compensation.

Plugging blind bores – a sphere is pressed in and crimped. Force output correlates to material displacement to determine density and retain force independent of stroke or the safe seating of bearings on shafts

Pressing to a functional dimension – the body edge and subsequent relative movement (delta stroke)

Pressing in expanders or crimping cable shoes. The sealing or holding function depends on the correlation of force and displacement.

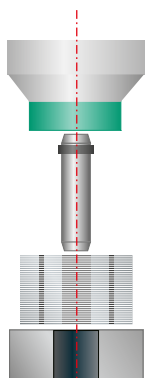


# Visualization and process analysis for PressControl 700 and 7000

## Visualization user surface

Important parameters for assessing the quality of press fits are the press force and the press stroke. The data of these measured variables are recorded during the process and displayed by the software as a force-displacement curve  $F/s$  or  $F/t$  or  $s/t$ .

For quality assurance of the joining process, freely definable tolerances are provided in the form of force-stroke windows and stroke tolerances. With the help of these criteria, the quality-critical areas can be precisely monitored. If the tolerances are not adhered to in the monitored curve areas, appropriate application-specific reactions can take place (e.g. selection measures).


Tolerance criteria can be created very easily and progression curves can be displayed exactly. Not only the working stroke but also the return stroke are important for the evaluation of the curves. The high resolution of our measuring systems allows a large number of measuring points, which are necessary for a process-reliable evaluation. Integrated zoom and measurement functions allow detailed statements on the joining processes.

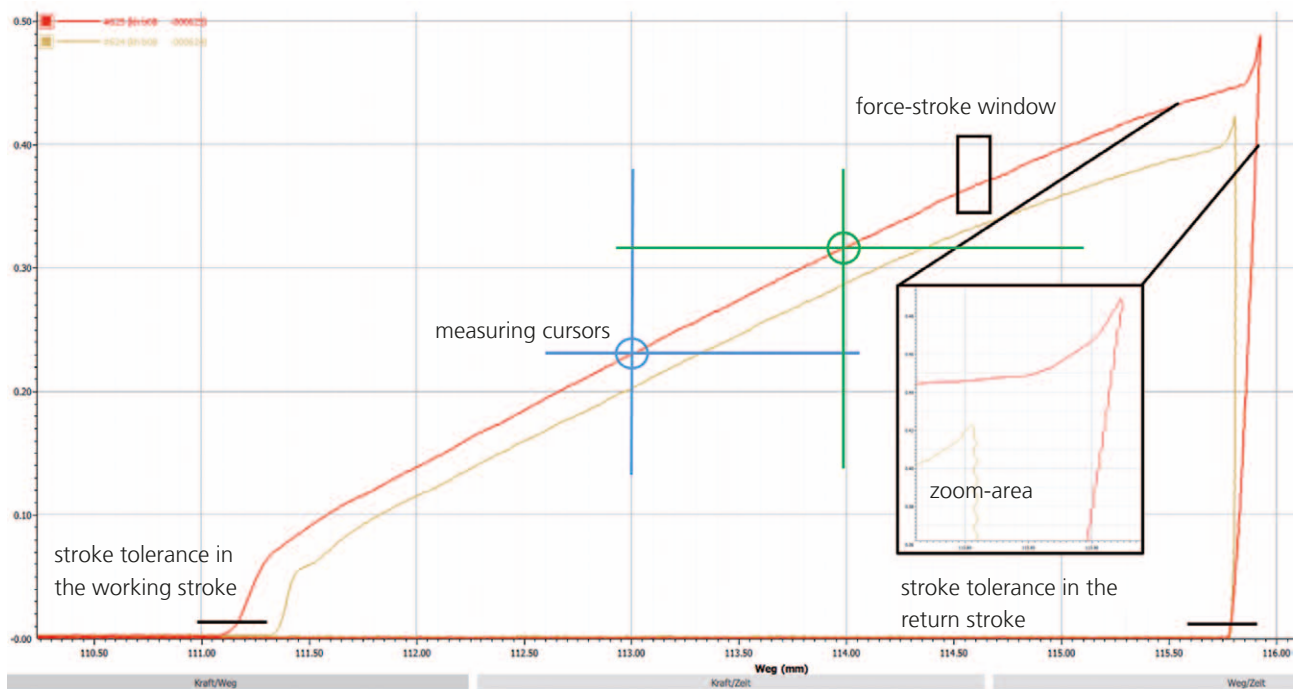

Process analysis – graphic display force over stroke

## SCHMIDT® MoveTol

Patented offset of tolerance, data software for PressControl 700 and 7000

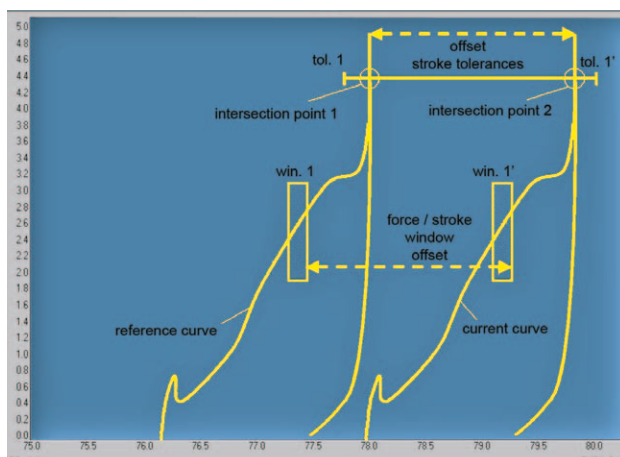

Assembly parts are subject to certain manufacturing tolerances. Height deviations of the parts result in an offset of the curves in the curve window. The curves of the parts with larger tolerance deviations can then lie outside the created tolerance limits and are declared as bad parts.

The height tolerances of the parts can be taken into account with the "Tolerance data offset" function. The defined tolerance windows and stroke tolerances are shifted by the distance to a reference position. The good/bad evaluation is then performed.

Offset of the tolerance data is relative to freely selectable references.